

## Flygt 2700-series

**Corrosion resistant dewatering pumps** 



## When the extreme is the ordinary



Mines, power stations, paper industries, steel mills, and chemical industries. These are typical examples of environments in which corrosive or abrasive liquids expose pumps to extra high demands. They are sometimes also combined with great and unpredictable changes in pH levels.

This is something that we have taken into account in the development of the Flygt 2700 series. The quality is as high as ever when you choose a pump from ITT Water & Wastewater. What is special is that the entire pump is made of stainless steel. This offers greater durability

in environments with extreme pH levels, and reduces the risk of unplanned interruptions in your operations due to pump failure. Greater durability also means that repair costs can be kept down. The fact that the Flygt 2700 series is also available as drainage and solids handling pumps gives you a more flexible offer for creating the most optimal dewatering solution possible.

So why complicate things? With a Flygt 2700 pump, you are on the right track from the start.





## Stainless steel when nothing else helps


Aluminium, cast iron, and pumps with a corrosion-protective coating work poorly in corrosive environments. The material corrodes quickly and the coating seldom seals completely. Furthermore, maintenance of the corrosion-protective coating is very time consuming and expensive.

With our Flygt 2700 series, you needn't worry about things like this. The stainless steel design enables the pumps to handle advanced drainage jobs in environments


where pH levels are unpredictable and varying – from very acidic to very alkaline. You get optimal protection against all types of corrosion, even in exposed areas such as connections, and between the different parts of the pump.

It is not the resistance to corrosion that is most important, but rather what this results in: trouble-free operation, reliability, and continuity.



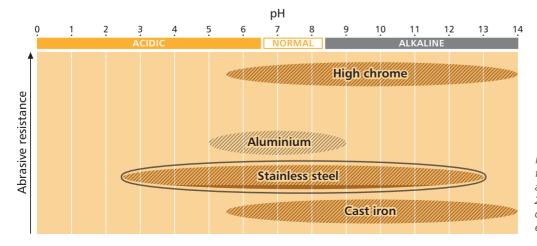

ITT Water & Wastewater has pumps for many different needs and applications. The pumps in the Flygt 2700 series are specially adapted to dewatering applications in environments with extreme pH levels.

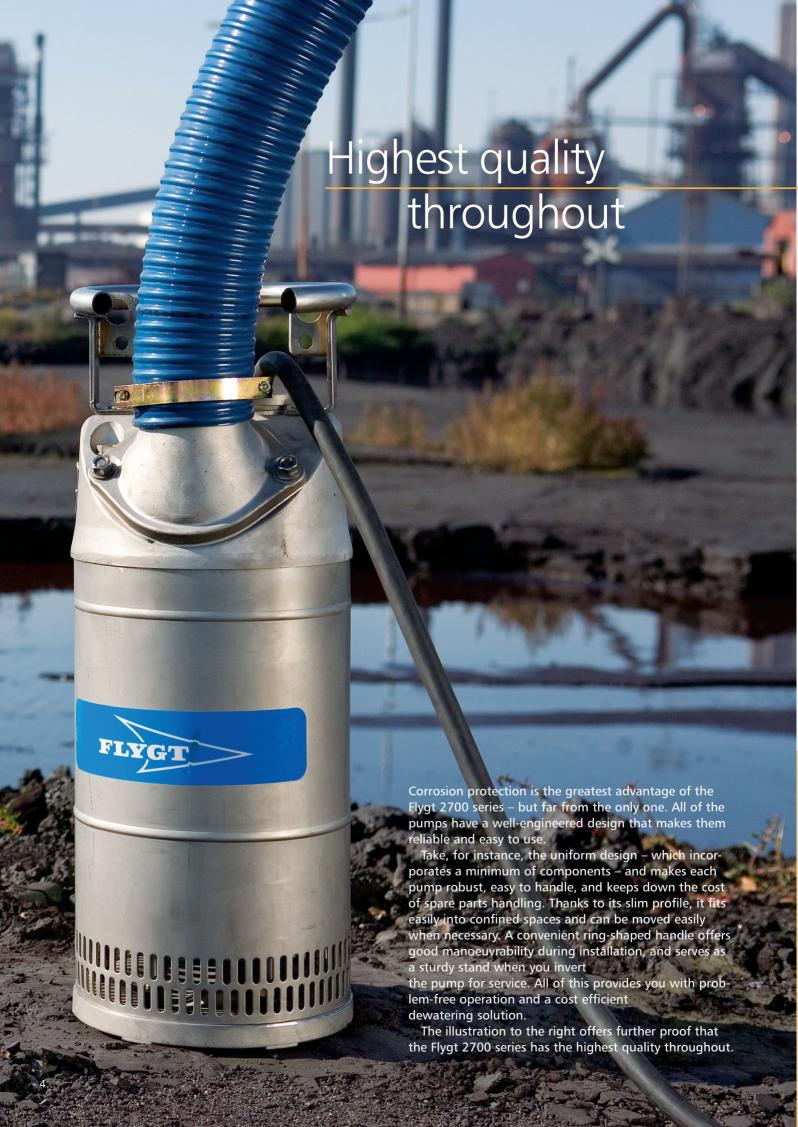

### Ring-shaped handle

Designed for good manoeuvrability. Also works as a sturdy stand during maintenance.

#### Turnable outlet

Vertical or horizontal outlet connection.

#### Motor\_

Short-circuited, high-performance motor in insulation class F(+155°C) for submersible operation that allows 15 starts per hour. The stator housing is stainless steel and has three integrated thermosensors.

## Stainless steel impeller\_\_\_\_

Tailored to work efficiently, and for a long time, in extreme environments.

## Removable junction box cover

Makes it easier to access the pump's electrical components.

## Corrosion and impact resistant outer casing

Stainless steel throughout, for better durability in tough environments.

## Double mechanical shaft seals

Work independently of each other. The same seal fits all pumps in the Flygt 2700 series.

### Adjustable diffusers

For optimized performance.

## External oil and inspection plugs

Smart location and easy to access. Simplifies service and maintenance.

### **Recessed vortex impeller**


Reduces wear on the wheel. Greater through-flow enables the pump to handle larger particles.

#### Freely adjustable turnable outlet

Provides added flexibility at the outlet connections.

#### **Robust stand in stainless steel**

Adds steadiness and stability. Creates free passage for larger particles.



# Find the right model for your needs

Flygt 2700 series
DRAINAGE PUMPS

Handle light contaminated liquids with particles up to  $25 \times 7$  mm. Available in both high head and high flow versions.

Flygt 2700 series
SOLIDS HANDLING PUMPS

Pumps for heavily contaminated liquids and with particles up to 80 mm.






## **Performance curves** 50 Hz [m] 60 BS 2750 HT 50 40 BS 2740 HT 30 20 BS 2750 MT 10 BS 2740 MT 30 [l/s] Flow

50 Hz									
[m	n] [								
2	5								
2	0								
Head	5			DS 2740					
1	0 =			$\neq$	-				
!	5		$\perp$	T	DS	2730			
		DS 2	2720	. "					
(	_ ٍ ه		10	1.5	20	25	20	25	[]/-1
	0	5	10	15	20	25	30	35	[l/s]
					Flow				

Pump data			
50 Hz	BS 2720	BS 2740	BS 2750
Power (kW)	2.0	5.6	8.0
Height (mm)	535	730	785
Width (mm)	195	280	280
Strainer hole (mm)	20×5	25×7	25×7

DS 2720	DS 2730	DS 2740
2.0	4.1	5.6
645	755	755
375	480	480
50	80	46
	2.0 645 375	2.0 4.1 645 755 375 480

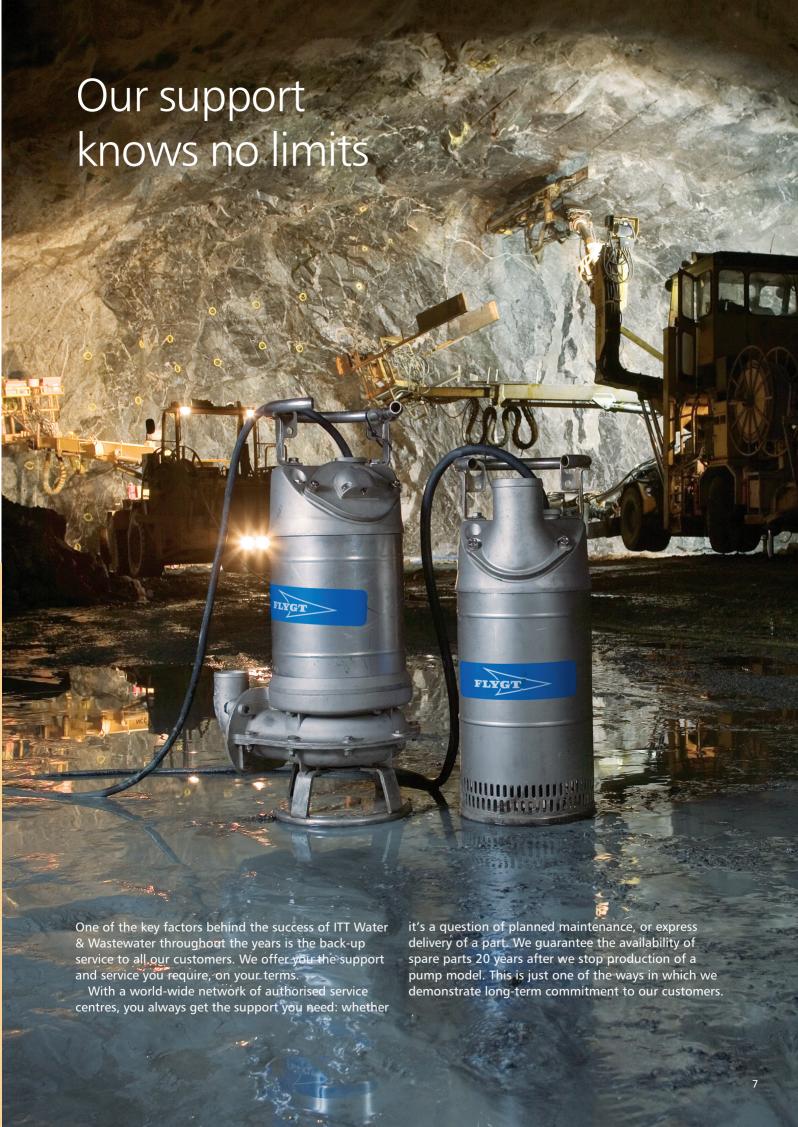



### What can ITT Water & Wastewater do for you?

Integrated solutions for fluid handling are offered by ITT Water & Wastewater as a world leader in transport and treatment of wastewater. We provide a complete range of water, wastewater and drainage pumps, equipment for monitoring and control, units for primary and secondary biological treatment, products for filtration and disinfection, and related services. ITT Water & Wastewater, headquartered in Sweden, operates in some 140 countries across the world, with own plants in Europe, China and North and South America. The company is wholly owned by the ITT Corporation of White Plains, New York, supplier of advanced technology products and services.

www.ittwww.com







